



Panglag 60

DESCRIPTION

PANGLAG 60 is premium grade natural rubber blend with high resistance to wear and abrasion. Product has an omni directional diamond profile surface and bonding layer for vulcanization to metal.

USAGE

PANGLAG 60 is used on conveyor belt drive, tail, bend pulleys, gravity take-up systems or where belt slippage or wear on components is present.

PROPERTIES

Polymer:	NR/BR/SBR
Color:	Black or white
Hardness:	60° duro scale shore "A" ± 5°
Tensile strength:	2,800 psi (19.3 MPa)
Elongation at break:	500%



ROLL SIZES ¹

PANGLAG 60 MINI DIAMOND

Catalog Number	Description
PLMD603/8W	Plag 60 3/8" x 60" x 42.5' w/BL
PLMD605/16W	Plag 60 5/16" x 60" x 42.5' w/BL
PLAG60MLWT5/16W	Plag 60 5/16" x 60" x 42.5' w/BL

PANGLAG 60 STANDARD DIAMOND

Catalog Number	Description
PLLD601/2W	Plag 60 1/2" x 60" x 42.5' w/BL
PLLD605/8W	Plag 60 5/8" x 60" x 42.5' w/BL

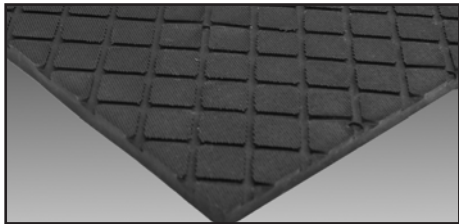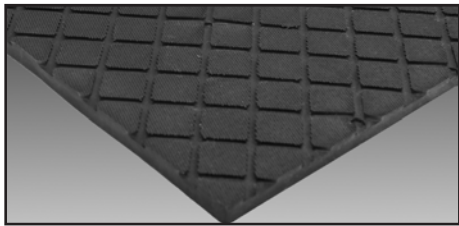

STORAGE

Store PANG rubber products, cements and solvents in a cool, dry, dark place. Avoid direct sunlight.

NOTE

PANG's Technical Support staff is available for specific recommendations to help select the type of rubber, thickness, and other data for a correct installation and service.

¹ Thickness specification follows MIL-R-3065E
 1/8" ± .020 1/4" ± .031 1/2" ± .047 3/4" ± .093 1" ± .100

Unless otherwise specified, single bonding layer.



For Best Results, Use These Products with Panglag 60



CFC-FREE PANGOFOL CHLOROPRENE CEMENT (Black)

Catalog Number	Quantity	Case Quantity
992F/QT	1.65 LBS (0.75 Kg)	10
992F/GAL	6.6 LBS (3 Kg)	4
992F/5GAL	33 LBS (15 Kg)	N/A
992F/55GAL	400 LBS (182 Kg)	N/A



NON-FLAMMABLE PANGOFOL CHLOROPRENE CEMENT (Black)

Catalog Number	Quantity	Case Quantity
992/QT	2.2 LBS (1 Kg)	10
992/GAL	11 LBS (5 Kg)	4
992/5GAL	55 LBS (25 Kg)	N/A
992/55GAL	628 LBS (290 Kg)	N/A



ACTIVATOR

Catalog Number	Quantity	Case Quantity
968F/30cc	30cc	12
968F/60cc	60cc	12



For Best Results, Use These Products with Panglag 60



PANG METAL PRIMER

Metal primer designed to give excellent cold bond adhesion of rubber-to-metal or rubber-to-concrete when used in conjunction with Pangofol Black or Pangofol White. Used to prime all metal or concrete substrates before applying adhesives. SHAKE WELL BEFORE EACH USE.

Catalog Number	Quantity	Case Quantity
960/QT	1 Quart (.95L)	10
960/GAL	1 Gallon (3.8L)	4



BUFOL RUBBER CLEANER

Bufsol is a CFC-free rubber cleaning solvent. Recommended for cleaning rubber and metal before applying primers or bonding cements.

Catalog Number	Quantity	Case Quantity
816F/QT	1 Quart (.95L)	12
816F/GAL	1 Gallon (3.8L)	4
816F/11OZ	11 oz (311 g) Aerosol Can	12

Recommended Tools

Catalog Number	Description
966	Hand Held Soft Brass Brush
S2022	1½" x 4" 36 Grit Contour Wheel
S2023	1½" x 4" 60 Grit Contour Wheel
T34	Rubber Mallet
S1032	2,800 RPM Air Grinder
939	2" x ¼" Stitcher
S990	Rapid Action Air Hammer
S992	Repair Installation Hammer



Panglag 60

Instructions for Use

APPLICATIONS

PANGLAG 60 is used for rubber lagging of pulleys and idlers.

PROCEDURE

1. Sandblast to white metal finish, or use abrasive disc. Avoid polishing the metal.
2. Remove dust. Clean the surface with a lint-free clean cloth slightly dampened with BUFSOL. Let dry.
3. Stir PANG PRIMER thoroughly and apply 1 coat to prepared metal surface. Let dry.
4. Stir PANGOFOL with ACTIVATOR. Mix thoroughly. This mixture is usable for 2 to 4 hours.
5. Apply a coat of PANGOFOL-ACTIVATOR mixture to the primed metal surface. Let dry.
6. Cut the rubber to appropriate size and remove protective backing from the bonding layer. The bonding layer can be cleaned or conditioned with BUFSOL if necessary. Let BUFSOL dry before applying PANGOFOL-ACTIVATOR mixture.
7. Place a strip of the protective backing 4" (100mm) wide across the width of the pulley with the ends slightly extending over the sides. Draw a straight line across the middle of the strip for lagging alignment.
8. Apply a second coat of PANGOFOL-ACTIVATOR mixture to the pulley and a first coat to the bonding layer. Let dry until slightly tacky. Align the edge of the lagging with the line on the strip.
9. Wrap the rubber around the pulley. Apply pressure from the center outward with a heavy stitcher to avoid trapping air. Hammer down with a rubber mallet.
10. Trace the upper edge of the leading end with chalk. Press the overlap end onto the chalk line to mark a line on the bottom of the rubber. Cut off any excess rubber on this line to match both ends under-cut end at 45° angle.
11. Lightly buff and clean the ends. Remove the strip. Apply a coat of PANGOFOL-ACTIVATOR mixture to the butts of both ends. Let dry until tacky.
12. Roll ends down firmly with a stitcher, applying pressure from the center outward. Clamp if necessary.
13. Trim the excess rubber around the edges of the pulley with a sharp rubber knife, cutting on the down stroke so as not to pull the rubber from the pulley.

WORKING TEMPERATURE RANGE

The maximum working temperature of PANGLAG 60 is 185°F (85°C).

COVERAGE

1 qt. (0.95 l) PANG PRIMER covers approximately 130 sq. ft. (12m²).

2.2 lbs. (1kg) of the cement mixture covers approximately 25 sq.ft. (2.3m²) single coat.